

Automação de processos na nuvem com Kogito e Quarkus

Ricardo Zanini


Senior Software Engineer @ Red Hat


Filippe Spolti

Software Engineer @ Red Hat

Cristiano Nicolai

Principal Software Engineer @ Red Hat

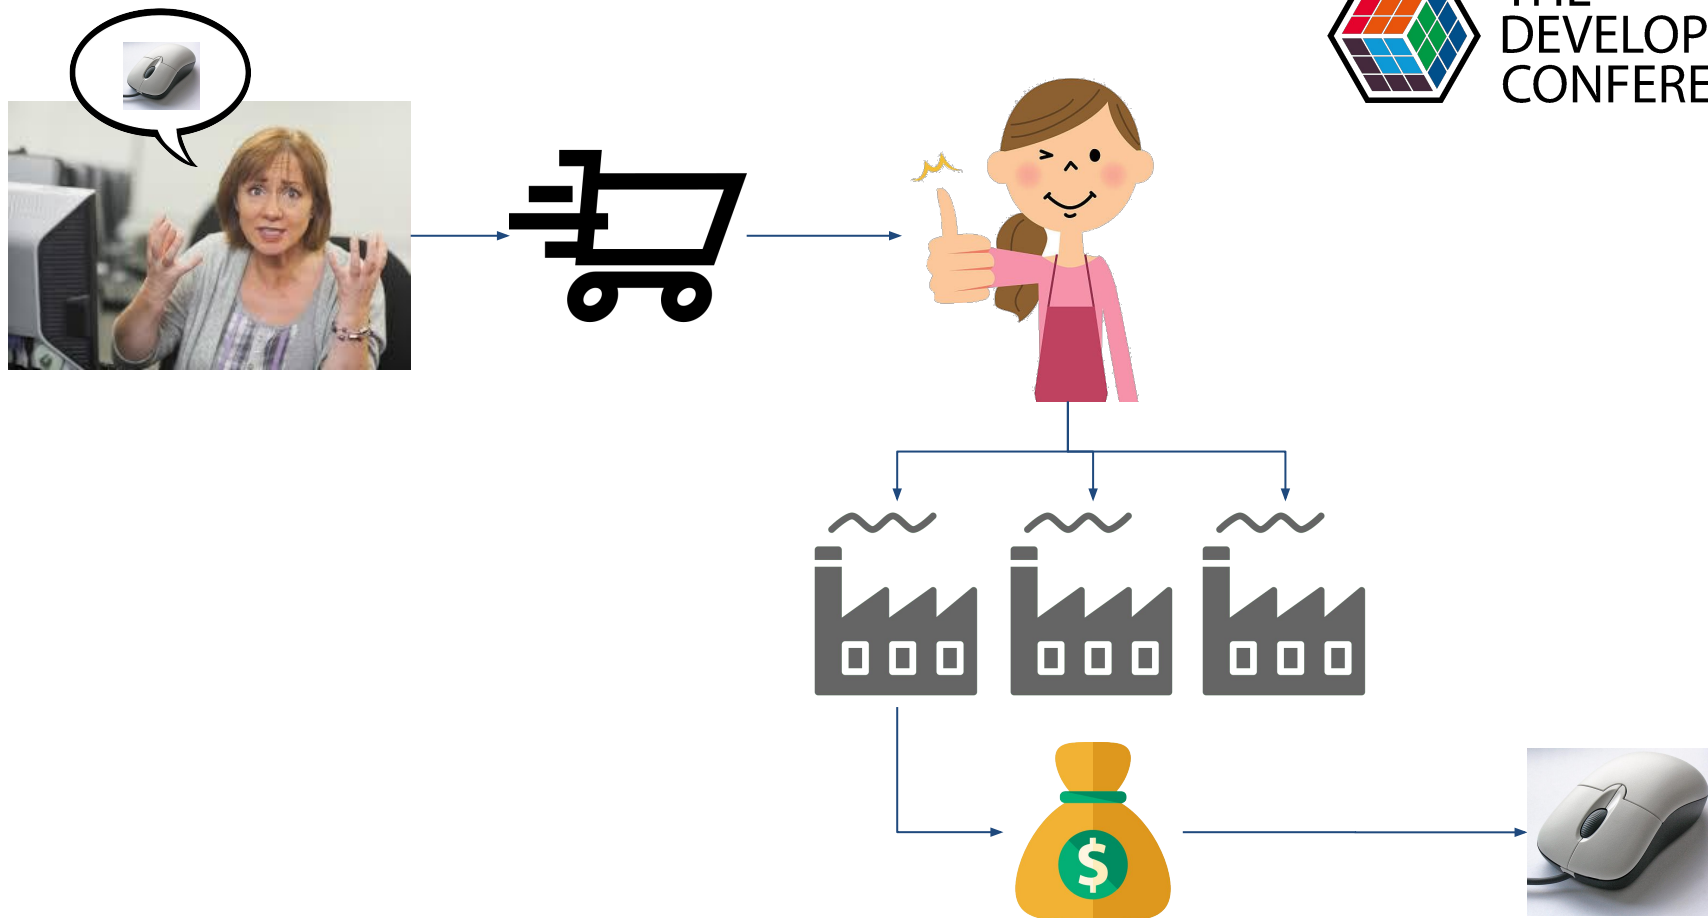

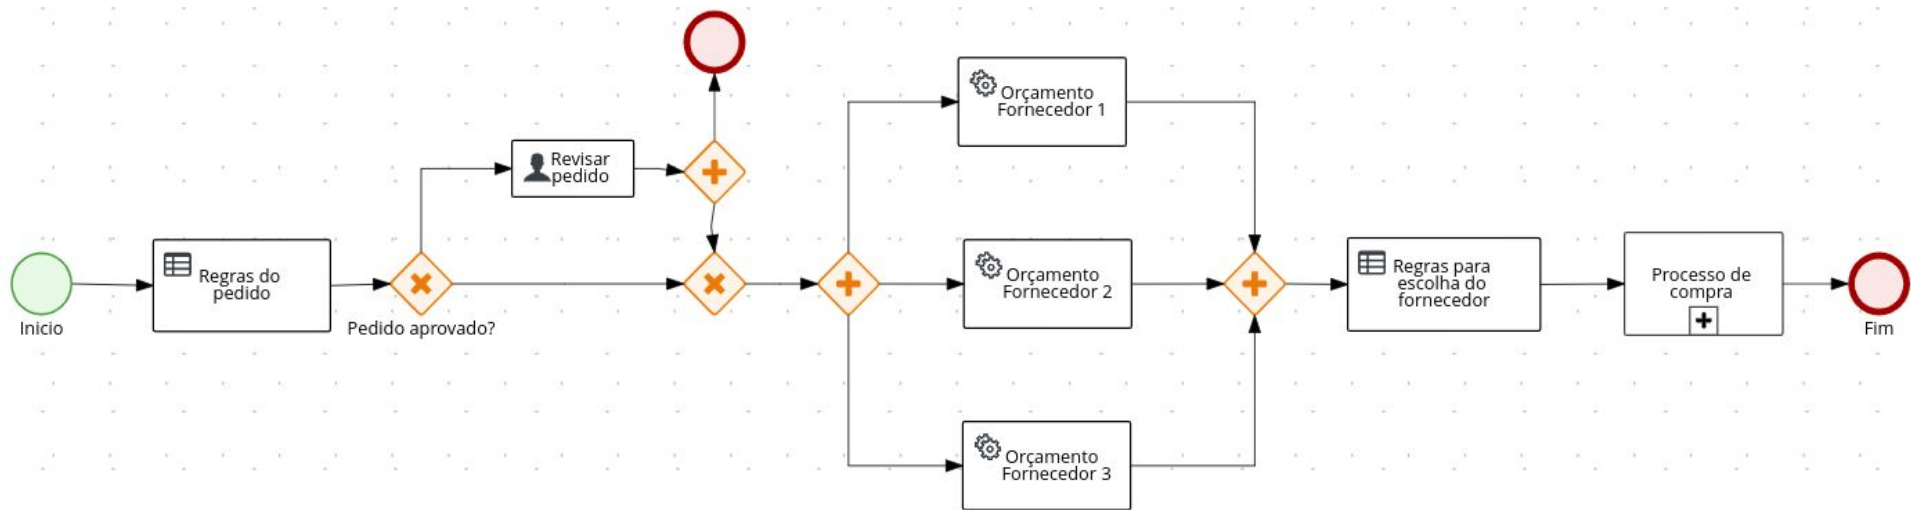




THE
DEVELOPER'S
CONFERENCE



jBPM




Drools

Visão geral da arquitetura



THE
DEVELOPER'S
CONFERENCE

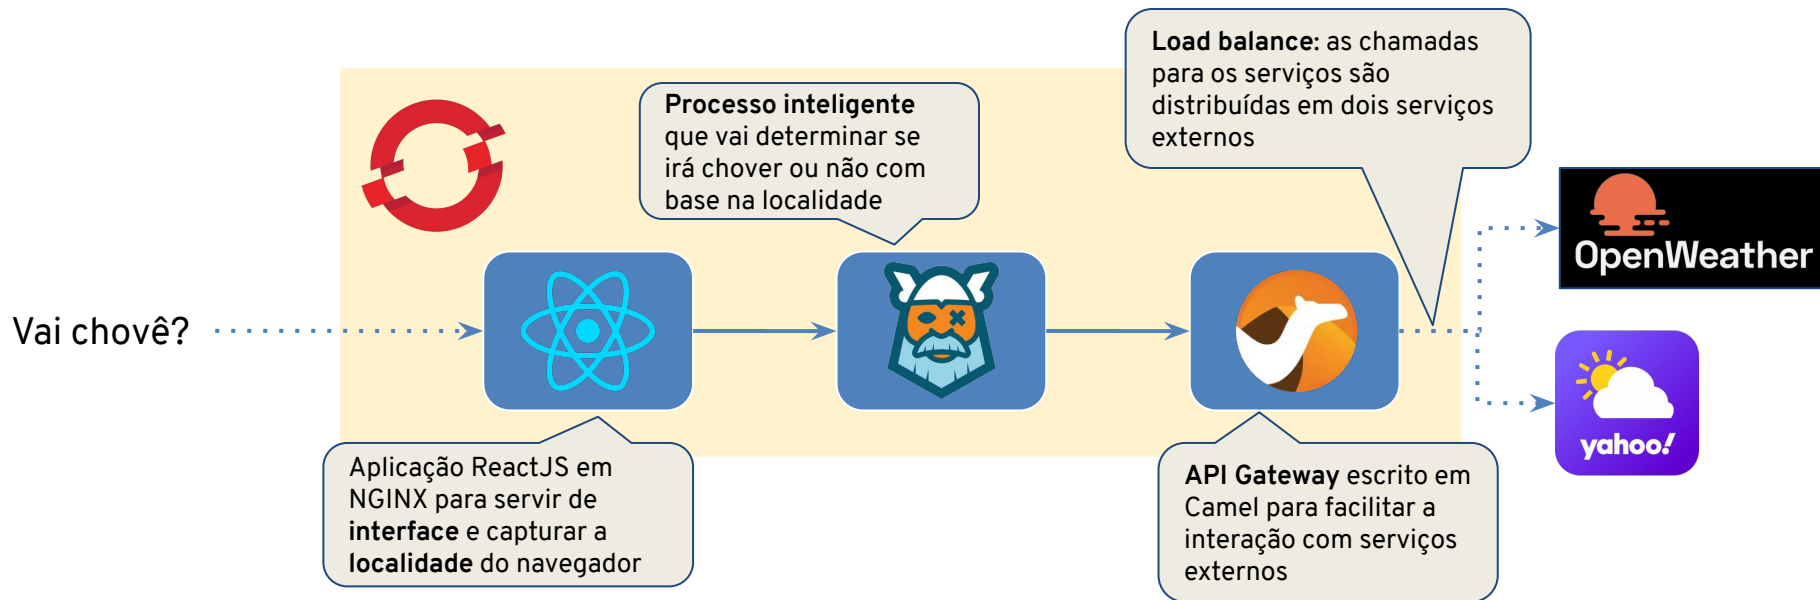


Demonstração



Por dentro do Kogito Service

Visão Geral do Processo

O que passa por dentro do Kogito Service?

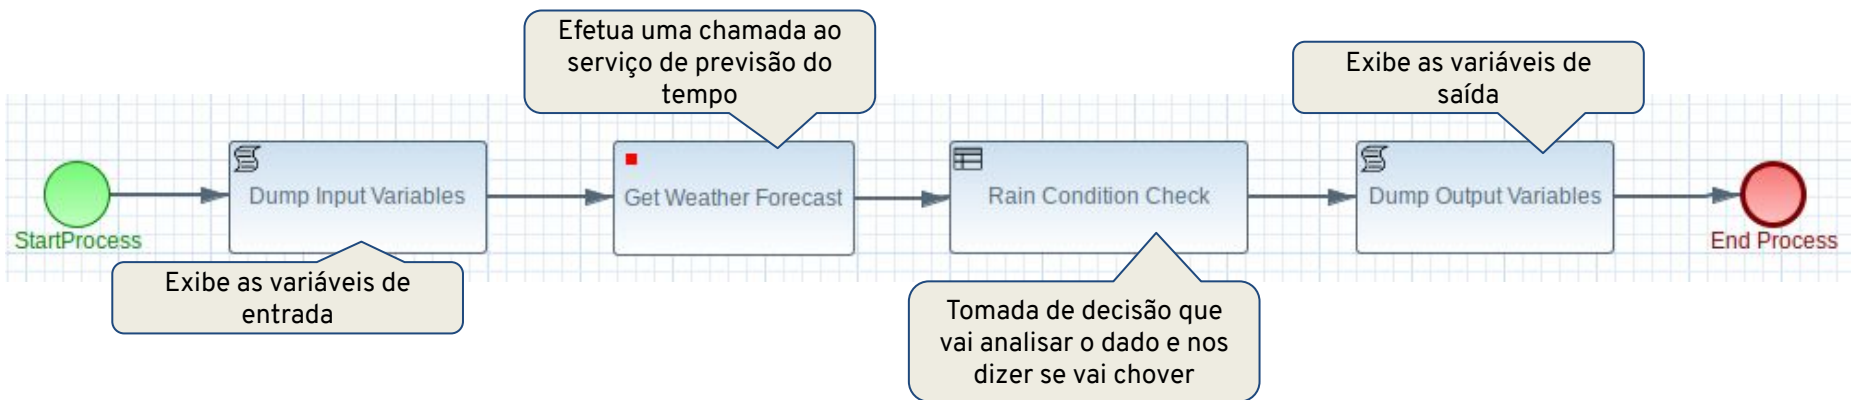

REST Automágico!



Generated API 1.0 OAS3

/openapi

default

GET /management/process/{processId}/instances/{processInstanceId}/error

POST /management/process/{processId}/instances/{processInstanceId}/retrigger

POST /management/process/{processId}/instances/{processInstanceId}/skip

GET /metrics

GET /rainforecast

POST /rainforecast

GET /rainforecast/{id}

POST /rainforecast/{id}

DELETE /rainforecast/{id}


GET /rainforecast/{id}/tasks

Aplicações Java nativas



```
[io.quarkus] (main) Quarkus 0.22.0 started in 0.034s. Listening on: http://[::]:8080  
[io.quarkus] (main) Installed features: [cdi, resteasy, resteasy-jsonb, smallrye-openapi, swagger-ui]
```

Service Discovery

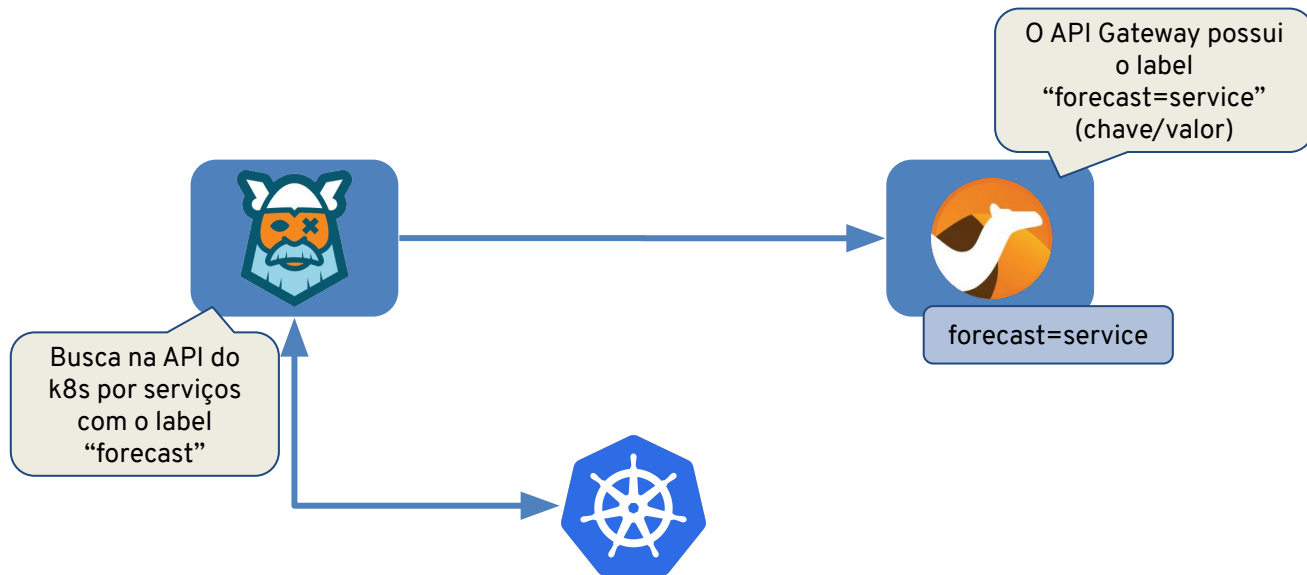

Tomada de decisão




```
rule "if condition is Rain, set object accordingly"
no-loop
  when
    $w : Weather ( condition == "Rain" )
    $r : Result ( )
  then
    modify($r) { setRain(true); };
end

rule "if condition is not Rain, set object accordingly"
no-loop
  when
    $w : Weather ( condition != "Rain" )
    $r : Result ( )
  then
    modify($r) { setRain(false); };
end
```

Como colocamos o Kogito na nuvem?

Kogito Images

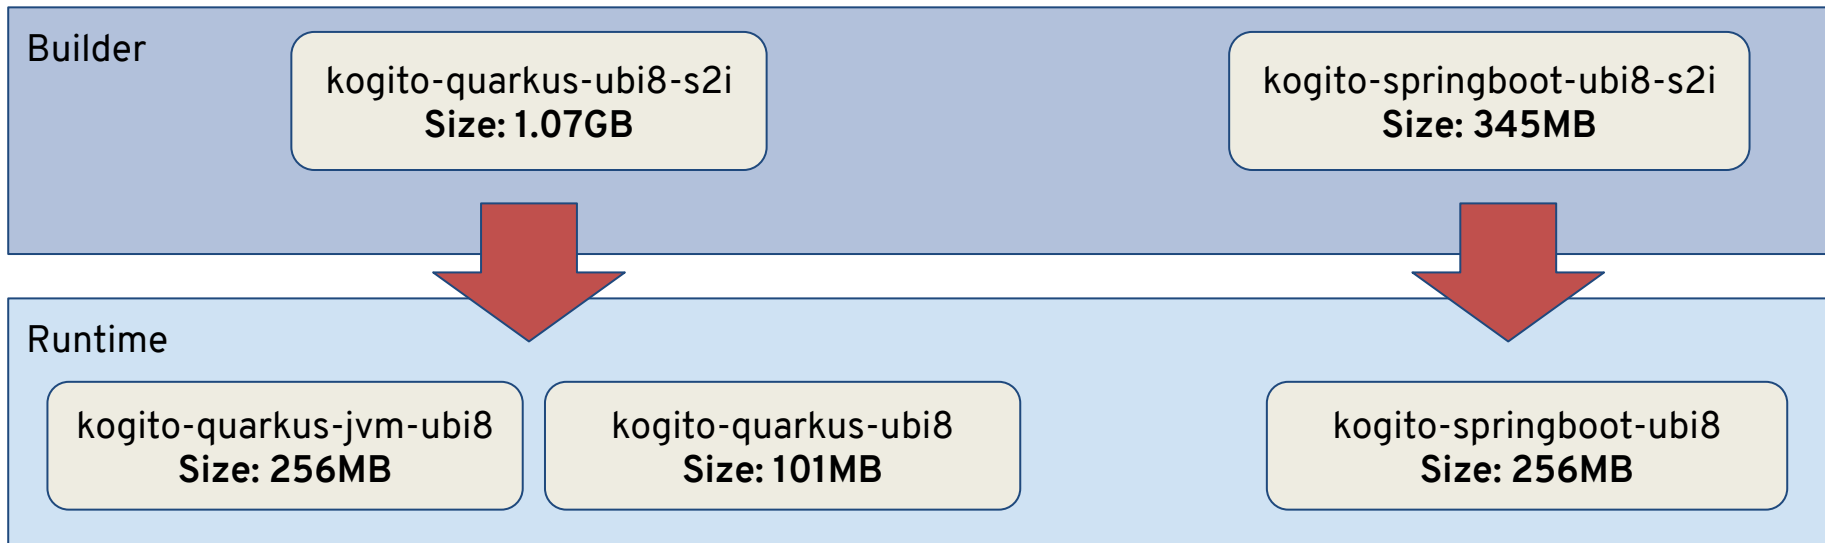

Kogito Operator



THE
DEVELOPER'S
CONFERENCE



Kogito Cloud Operator

0.4.0 provided by Red Hat, Inc.

[Install](#)

OPERATOR VERSION
0.4.0

PROVIDER TYPE
Community

PROVIDER
Red Hat, Inc.

REPOSITORY
<https://github.com/kiegroup/kogito-cloud-operator>

CONTAINER IMAGE
quay.io/kiegroup/kogito-cloud-operator:0.4.0

CREATED AT
2019-08-22T13:12:22Z

SUPPORT
Red Hat, Inc.

Community Operator

This is a community provided operator. These are operators which have not been vetted or verified by Red Hat. Community Operators should be used with caution because their stability is unknown. Red Hat provides no support for Community Operators.

[Learn more about Red Hat's third party software support policy](#)

Kogito Operator is designed to deploy Kogito Runtimes Services from source and every piece of Infrastructure that the services might need:

- Creates two kinds of build configuration: Native or JVM. For more information refer to [Native X JVM Builds](#) on our docs
- Builds a Kogito Runtime Service from a remote git repository and creates a custom image for the given runtime: Quarkus or Springboot. [See more.](#)
- Installs the [Kogito Data Index Service](#) to enable data index feature for Kogito Runtimes. [See more.](#)

Kogito CLI



THE
DEVELOPER'S
CONFERENCE

```
$ kogito new-project tenkichannel  
$ kogito deploy rain-forecast https://github.com/ricardozanini/tenkichannel  
--context-dir=rain-forecast-process -e NAMESPACE=tenkichannel -p tenkichannel
```


Links úteis



- <https://github.com/ricardozanini/tenkichannel>
- <https://github.com/kiegroup/kogito-runtimes#contributing-to-kogito>
- <https://github.com/kiegroup/kogito-cloud/tree/master/s2i>
- <https://github.com/kiegroup/kogito-cloud-operator>
- <https://github.com/kiegroup/kogito-cloud-operator>
- <https://github.com/kiegroup/kogito-examples>
- <https://kogito.kie.org/>
- <https://quarkus.io/>
- <https://kogito.kie.org/community/>

Obrigado!



THE
DEVELOPER'S
CONFERENCE



[@filippespolti](#)
[@zanini_os](#)
[@cris_nicolai](#)
[@kogito_kie](#)
[@rhdevelopers](#)

